



CONV-MAK FC Series Customized Frequency Converters

400 kVA / 320 kW Frequency Converter
 400V 50Hz / 400V 60Hz “BV”Certificated



- True On Line-Double Conversion Technology (Class VFI-SS-111)
- IGBT PWM Rectifier & Inverter Technology - DSP Control
- Customized Application
- Low Input Current THD (<3%)
- High Input Power Factor (>0.99)
- High Efficiency up to 93%
- Optional Dual Input
- Wide Input Voltage Range
- If Needed Battery Connection Possibility & Perfect Battery Management
- Isolation Transformer At Output
- Optional N+1 of Paralleled Modules
- Perfect Sinus Output and Strong Protection and SNMP Control
- 500 Real Time Event Log with 180 Detailed Parameters “Excel Output”
- Perfect for Radar and Customized Solution
- Overload and Short Circuit Protection
- Small Footprint and Easy Maintenance
- Advanced Communication Capabilities
- Perfect Generator Compatibility
- Customizable as Customer Need
- 50Hz / 60Hz - IP55



Customized Applications



Outdoor Solutions



Planes Ground Units

*400kVA / 320kW



400 kVA / 400kW 400V 50Hz to 60Hz
 Frequency Converter



Technical Advantages of CONV-MAK FC

The CONV-MAK FC Series An Advanced Converter Technology

FC Series is a true Online Double Conversion, new generation fully digital controlled converter. It is designed with high efficiency and robust comply high availability power needs of a wide variety of critical applications and delivers advanced power solution with low cost of ownership.

High Performance Power Protection Designed for Maximum Efficiency and Flexibility

Equipped with its new IGBT rectifier FC series keeps your critical loads protected while its space-saving compact design and front access for maintenance successfully reduce mean time to repair (MTTR).

Thanks to the wide variety of accessories and options FC Series presents maximum flexibility advantage to users and optimizes total cost of ownership.

⦿ DSP Power Factor Corrected IGBT Rectifier

IGBT based power factor correction technology provides Input Power Factor close to 1 (≥ 0.99) and keeps Input Current Total Harmonic Distortion (THDi) less than 3%, that helps to avoid the disturbance.

⦿ Low Input Current THD

(THDi) less than 3% avoids the disturbance to connected loads

⦿ Digital Control System

All of the control functions for FC Series Converter including power-on, start-up control, input stage power factor control, If needed battery charging and boosting control, output stage ac voltage regulation and shut-down control, can be realized by using a single DSP control board.

⦿ High Input Power Factor

0,99 Input power factor ensures clean and sinusoidal input current. The high input power leads to reduced electricity pay-out, minimizes cable, switchboard, fuse and generator requirements, thus reducing investment cost.


⦿ High Efficiency & Low Total Cost of Ownership

With its high efficiency up to 93% FC Series Converter consumes less energy to supply the loads. Thanks to this high efficiency rate, the percentage of energy that is produced as heat is reduced to a minimum. As a result of decreased heat emission users can reduce their electricity usage and air conditioning requirements.

⦿ Flexibility of The Converter

FC is compatible with wide range of application. Flexibility achieved through many choices, including type of battery, single or multi-unit configuration, accessories and options.

- ⦿ Isolation transformers to vary neutral connectivity in the event of separate power sources or for galvanic isolation between input and output
- ⦿ Customized dimensions if needed for your projects till IP54

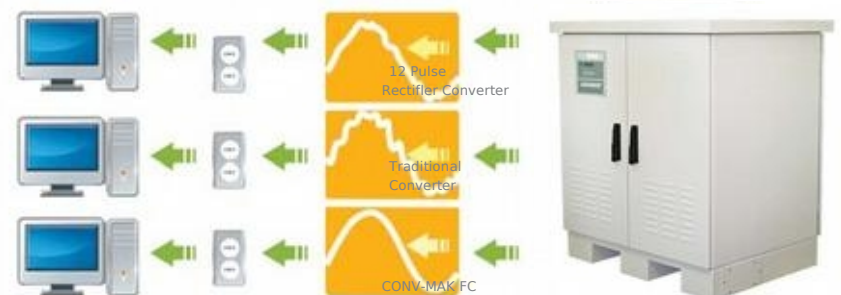

| | THD | Power Factor |
|---|------|--------------|
| CONV-MAK FC with IGBT Rectifier | <3% | <0.99 |
| Traditional Converter with Input Filter | <10% | <0.95 |
| Converter without Input Filter | <25% | <0.85 |

Technical Advantages of CONV-MAK FC

Auto Restart

When Converter will reach its end of discharge or with-out energy,So the converter will shut down.

The Converter will automatically restart and enable output power:

- After utility power is restored
- After the "Auto Start Delay Time" is expired (the default delay is 5 minutes) .

EPO(Emergency Power Off)

EPO function is designed to switch off the converter in emergency conditions (fire, flood, etc.). The system will turn off the rectifier, inverter and will stop powering the load immediately (including the inverter and busbar).

Reverse Energy Tolerance for Regenerative Loads

The FC Converter can be used with regenerative loads, such as synchronous motors. The regenerative loads pump the energy back to mains, traditional systems burn this feedback energy and this causes lower efficiency. Boxer Series with IGBT rectifier are able to absorb intermittent load generated power. Additionally, this reverse power tolerance permits execution of important system operations like closed transition transfers of the Converter load directly to an engine generator Source if connected.

Advanced User Interface

The Converter has Large and user-friendly 320x240 LCD display that provides operating information in four different languages. Thanks to this advanced LCD display all parameters of working device can be monitored and controlled. Converter is capable of recording up to 500 events and 180 Parameters/event.

Optional Parallel Operation

Conv-Mak FC Series features easy and simple scalability and redundancy. It is ready to grow with your business demands. Different power rated units and any number of converters can be connected in parallel.

Power Increase: The converter's can be connected in parallel or one solution waits and the othe one to increase total capacity of the system. If one of the devices goes out of order, the other machine will Take over the load in max 30milisecond or as optional as well the critical loads are transferred to by-pass.

Optional Parallel Operation Features :

- Internal standard parallel microprocessor for all models.
- Up to 16 units parallel able as customized.
- Parallel connection with ring cable
- Auto-sensing disconnected parallel cable
- Equal current share with DSP control
- Optional power upgrade with 30milisecond interruption or without any interruption
- All parallel systems can be controlled from the front panel of one unit
- Full synchronization of parallel units
- Isolated parallel operation card
- The power increasing solution with transfer contactors



Vibration Reduction



CONV-MAK FC Series Customized Solution Specifications

| | |
|---|---|
| Capacity | 400KVA Temperature With BV "Bureau Veritas"Certificate if Needed |
| Power Watt | 320kW |
| INPUT | |
| Input Voltage Range | 400V -10% +10% 3P+PE / Delta Connected & Bottom Cable Connection |
| Input Power Factor | At Full Load >0.99 |
| Input Frequency Range | 50Hz "45Hz - 55Hz" |
| Rectifier | IGBT |
| Total Harmonic Distortion (THDi) | <3% |
| OUTPUT | |
| Output Voltage Range | 400V 3P+PE / 60Hz & Usable as Delta & Star Connected at the Same Time & Bottom Cable Connection |
| Recovery | 1% Back to Band <40ms "410V - 420V" |
| Efficiency | Online Mode Up to 89% |
| Output Frequency Range | 60Hz & Max $\pm 2\%$ Synchronous With the Network "48Hz -52Hz" |
| THD (THDv) | Linear Load <2% Non-Linear Load <5% |
| Crest Factor (CF) | 3:1 |
| Overload Capacity* | At 125% Load 10min, at 150% Load 1min |
| COMMUNICATION | |
| Communication Port | RS232 Standard, RS485, SNMP Adapter Option & Dry Contact Card |
| Dry Contact | Optional |
| Protocol | SEC, TELNET |
| STANDARDS | |
| Quality & Used Electrical Parts | ISO 9001 - ISO 14001 - ISO 18001 & IGBT Infenion or Mitsubishi & Electrical parts are Certificated from Korea, EU & Turkey |
| Performance | EN62040 -3 (VFI-SS-111) |
| EMC/LVD | EN62040 - 2 / EN62040 -1 EN60950 |
| GENERAL | |
| Running & Storage Temperature | Customized 0°C~45°C Fresh Air Cooling with Special Design / 0°C ~45°C |
| Electrical Protection | Over & Low Frequency / Over & Low Voltage / Over Current / Over Temperature Protection Degradation |
| Protection Class | Standard without Air Conditioner & IP22 |
| Chassis & Humidity | Anti-Static Paint Protection & 0-95% |
| Screen | Standard 4x20mm or 320mm x 240mm or Touch or & Outdoor Screen & With Mimic Diagram Languages English, German, Spanish & Russian |
| Altitude | <1000Meter @35°C |
| Alerts | 500 Event Logs & 180 Parameters for Each Log "As Excel Sheet" "Optional Parallel" |
| Parallel Operation | Parallel Power Increase up to 4pcs. And Customized Solutions With Contactor 20Ms - 40Ms Transfer Time |
| Carriage | Two Pieces Easy To Carry with Fork Lift or Crane |
| Isolation Transformer | Output Isolation |
| Net Weight (kg) | 3980kg / Packed 4180kg |
| Dimensions (WxDxH) (mm) | Dimensions: 2500 x 1500 x 2200 / Packed: W2600mmxD1600mmxH2350mm "Will be installed top of a Metal Vessel" |
| NOTE: CUSTOMIZED SOLUTIONS ARE POSSIBLE, PLEASE ASK FOR THE NEEDED SOLUTION | |
| WARRANTY 2 YEARS AFTER INSTALLATION | |

O P T I O N A L

Mak Plus Power Systems UG reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Mak Plus Power Systems UG products previously or subsequently sold. Mak PP Systems does not guarantee the items of the accuracy and completeness.



CONV-MAK FC Series Customized Solution Drawings

